


Masonry anchor

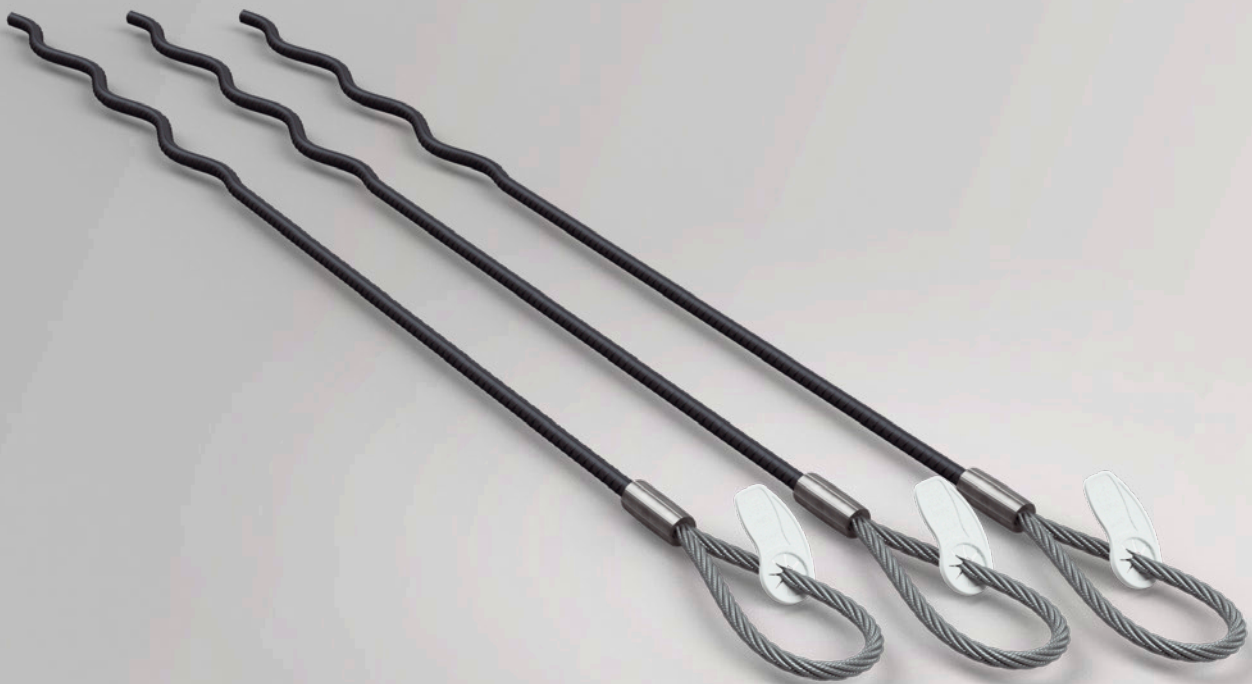

VB3-T-044-en - 01/24 - PDF

Data sheet

Our products from the division BUILDING SOLUTIONS

SERVICES





- » On-site tests -> we ensure that your requirements are properly covered by our planning.
- » Test reports -> for your safety and documentation.
- » Trainings -> the knowledge of your employees from planning and production is enhanced by our experts on site, online or via webinar.
- » Planning support -> latest design software, planning documents, CAD data and much more can be downloaded any time from www.philipp-group.de.

HIGH DEMANDS ON PRODUCT SAFETY AND PRACTICALITY

- » Close cooperation with notified bodies and - if necessary - approval of our solutions.

TECHNICAL DEPARTMENT

- » Our expert-team will support you at any time during your planning phase with detailed advice.








GENERAL PRODUCT INFORMATION

Masonry anchors are used for the transport of prefabricated masonry walls.

When using Masonry anchors attention must be paid to the General Installation Instruction. Depending on the individual application it might be necessary to contact our technical department before use.


TABLE 1: MASONRY ANCHOR WITH CRIMPED-ON WIRE ROPE LOOP (TYPE MW)

| Ref. no. | Type | perm. F_z ① (kN) | Dimensions | | Colour code |
|-------------|--|--------------------------|---------------------------|---------------|---------------|
| | | | $\varnothing d_s$ (mm) | L (mm) | |
| 73MW08_____ |  MW 0.9 | 9.0 | 8 | on request | sulfur yellow |
| 73MW10_____ |  MW 1.4 | 14.0 | 10 | | jet black |
| 73MW12_____ |  MW 2.0 | 20.0 | 12 | | clay brown |
| 73MW14_____ |  MW 3.1 | 31.0 | 14 | | salmon orange |
| 73MW16_____ |  MW 4.0 | 40.0 | 16 | | emerald green |

① Load bearing capacity of steel for axial tension. The weight of 1.0 t corresponds to 10.0 kN.

② To get the complete ref. no. please add the required anchor length L (mm).

Example: required anchor length 950 mm = item number: 73MW080950

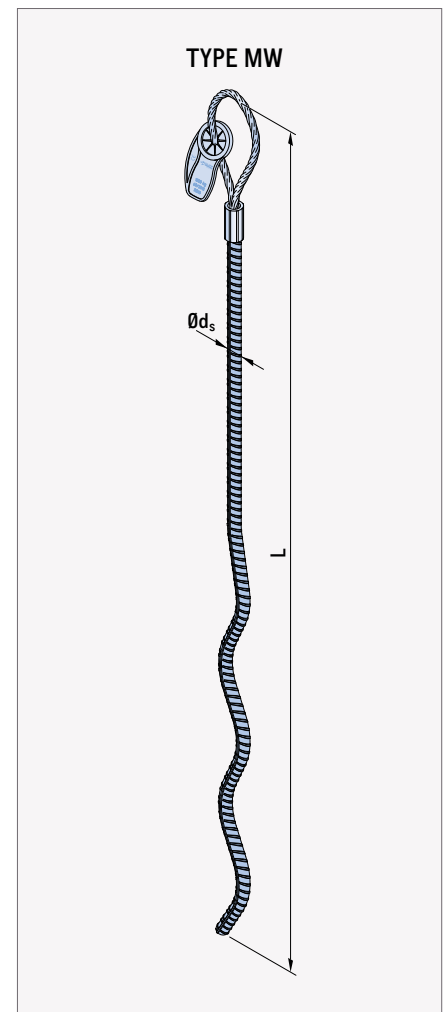

FURTHER QUESTIONS

If you have further questions, please have a look at our website www.philipp-group.de or call our technical department under +49 6021 40 27-318 resp. send an email to technik@philipp-gruppe.de.



**PHILIPP GmbH
Headquarters**

Lilienthalstraße 7-9
63741 Aschaffenburg

+49 6021 40 27-0

info@philipp-gruppe.de

**PHILIPP GmbH
Production and logistics**

Hauptstraße 204
63814 Mainaschaff

+49 6021 40 27-0

info@philipp-gruppe.de

**PHILIPP GmbH
Office Coswig**

Roßlauer Straße 70
06869 Coswig/Anhalt

+49 34903 6 94-0

info@philipp-gruppe.de

**PHILIPP GmbH
Office Neuss**

Sperberweg 37
41468 Neuss

+49 2131 3 59 18-0

info@philipp-gruppe.de



PHILIPP Vertriebs GmbH

Pfaffing 36
5760 Saalfelden / Salzburg

+43 6582 7 04 01

info@philipp-gruppe.at



Visit us!

www.philipp-group.de